


SPLIT


Medium Static Pressure Duct

Compact & Comfort



High Efficiency & Quiet operation

The combination of the V-shaped heat exchanger, air stabilizer, and the high efficient DC fan motor allowed high efficiency and quiet operation.

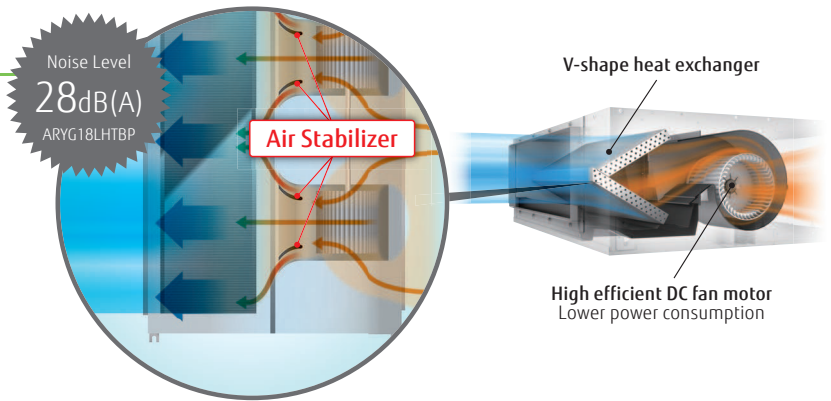



Automatic Airflow adjustment function

This unique and innovative function detects required air flow in each application case and automatically adjust the volume.



Improved installation flexibility


- Capable to be installed in various applications that requires static pressure of 30 Pa to 200 Pa*
 - Built-in drain pump, rises drain up to 850 mm
 - Unified depth throughout the range enables the selection of the capacity regardless of the additional space.
- (*: 12/14/18/24/30/36 models)




Improved service and maintenance

- Drain pump is easily detachable from the side
- Easy access to electrical box
- Error code can be checked more in detail from error history

Low ambient operation

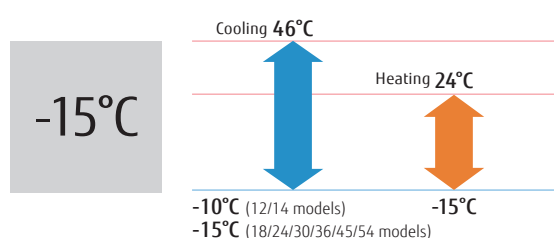

**Model: ARYG12LHTBP / ARYG14LHTBP / ARYG18LHTBP / ARYG24LHTBP
ARYG30LHTBP / ARYG36LHTBP / ARYG45LHTBP / ARYG54LHTBP**




Specifications

Model No.	Indoor unit		ARYG12LHTBP	ARYG14LHTBP	ARYG18LHTBP	ARYG24LHTBP	ARYG30LHTBP	ARYG36LHTBP	ARYG45LHTBP	ARYG54LHTBP
	Outdoor unit		AOYG12LBLA	AOYG14LBLA	AOYG18LBCA	AOYG24LBCA	AOYG30LBTA	AOYG36LBTA	AOYG45LBTA	AOYG54LBTA
Power Source			Single-phase, ~230V, 50Hz							
Capacity	Cooling	kW	3.5 (0.9-4.4)	4.3 (0.9-5.4)	5.2 (0.9-6.5)	6.8 (0.9-8.0)	8.5 (2.8-10.0)	9.4 (2.8-11.2)	12.1 (4.0-14.0)	13.4 (4.5-14.5)
	Heating		4.1 (0.9-5.7)	5.0 (0.9-6.5)	6.0 (0.9-7.5)	8.0 (0.9-9.1)	10.0 (2.7-11.2)	11.2 (2.7-12.7)	13.3 (4.2-16.2)	16.0 (4.7-16.5)
Input Power	Cooling/Heating		0.90/1.00	1.18/1.25	1.37/1.48	1.95/2.21	2.65/2.70	2.83/3.07	3.59/3.44	4.42/4.62
	Cooling	W/W	3.89	3.64	3.80	3.49	3.21	3.32	3.37	3.03
COP	Heating		4.10	4.00	4.05	3.62	3.70	3.65	3.87	3.46
Pdesign	Cooling/Heating(-10°C)		3.5/4.2	4.3/4.5	5.2/4.3	6.8/6.0	8.5/8.0	9.4/8.7	-	-
	Cooling	W/W	6.20	6.10	7.15	6.50	5.95	5.81	-	-
SEER	Cooling		6.20	6.10	7.15	6.50	5.95	5.81	-	-
	SCOP	Heating (Average)		4.10	4.00	4.11	4.01	3.95	3.81	-
Energy Efficiency Class		Cooling	A++	A++	A++	A++	A+	A+	-	-
	Heating (Average)		A+	A+	A+	A+	A	A	-	-
Max. Operating Current	Cooling/Heating		8.0/10.5	9.5/13.0	10.0/13.5	13.5/18.5	17.0/17.0	20.0/20.0	22.5/22.5	23.5/23.5
	Cooling	kWh/a	198	247	255	366	500	566	-	-
Annual Energy Consumption	Heating		1,434	1,573	1,462	2,092	2,833	3,194	-	-
	Moisture Removal			l/h	0.7	0.9	1.2	1.8	2.3	2.0
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	32/27/26/24	33/28/27/25	28/25/22/20	32/28/24/21	36/33/30/29	36/31/28/26	39/35/31/29	39/35/31/29
	Indoor (Heating)	H/M/L/Q	32/27/26/24	33/28/27/25	28/25/22/20	32/28/24/21	36/33/30/29	33/31/28/26	39/35/31/29	39/35/31/29
	Outdoor (Cooling/Heating)	High	47/48	49/49	50/51	55/56	53/55	54/55	55/55	55/57
Sound Power Level	Indoor (Cooling/Heating)	High	57/58	59/60	54/54	57/57	63/65	64/63	67/69	67/69
	Outdoor (Cooling/Heating)	High	60/61	64/63	63/62	68/68	68/69	69/70	69/68	69/71
	Indoor / Outdoor (Cooling)	High	850/1,780	950/1,910	1,050/1,900	1,360/2,460	1,700/3,600	2,050/2,800	2,550/6,750	2,550/6,750
Airflow Rate	Indoor / Outdoor (Heating)	High	850/1,630	950/1,740	1,050/1,700	1,360/2,340	1,700/3,600	1,850/2,800	2,550/6,200	2,550/6,850
	Static pressure range (Standard)		Pa	30 to 200 (35)	30 to 200 (35)	30 to 200 (35)	30 to 200 (35)	30 to 200 (47)	30 to 200 (47)	30 to 160 (60)
Net Dimensions H x W x D	Indoor	mm	300*700*700	300*700*700	300*1,000*700	300*1,000*700	300*1,000*700	300*1,400*700	300*1,400*700	300*1,400*700
	Outdoor	mm	578*790*300	578*790*300	620*790*290	620*790*290	830*900*330	830*900*330	1,290*900*330	1,290*900*330
Weight	Indoor	kg(lbs)	27 (59)	27 (59)	36 (79)	36 (79)	36 (79)	46 (101)	46 (101)	46 (101)
	Outdoor	kg(lbs)	40 (88)	40 (88)	41 (90)	41 (90)	61 (134)	61 (134)	86 (189)	86 (189)
Connection Pipe Diameter (Liquid / Gas)			mm	6.35/9.52	6.35/12.70	6.35/12.70	6.35/15.88	9.52/15.88	9.52/15.88	9.52/15.88
Drain hose Diameter (I.D./O.D.)			mm	25/32	25/32	25/32	25/32	25/32	25/32	25/32
Max Pipe Length (Pre-Charge)			m	25 (15)	25 (15)	30 (15)	30 (15)	50 (20)	50 (20)	50 (20)
Max Height Difference				15	15	20	20	30	30	30
Operation Range	Cooling	°CDB	-10 to 46	-10 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46
	Heating	°CDB	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24
Refrigerant	Type (Global Warming Potential)		R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)
	Charge	kg(CO ₂ eq-T)	1.15 (2.4)	1.25 (2.6)	1.80 (3.8)	1.80 (3.8)	2.10 (4.4)	2.10 (4.4)	3.35 (7.0)	3.35 (7.0)

Optional parts


- Wired Remote Controller: UTY-RNRYZ3, UTY-RVNYM, UTY-RNNYM, UTY-RLRY
- Simple Remote Controller: UTY-RSNYM, UTY-RSRY, UTY-RHRY
- IR Receiver Unit: UTY-LBTYM
- Wireless LAN Interface: UTY-TFNXZ1
- External connect kit: UTY-XWZXZG

- Long life filter: UTD-LFNA (ARYG36/45/54LHTBP), UTD-LFNB (ARYG18/24/30LHTBP), UTD-LFNC (ARYG12/14LHTBP)
- Remote Sensor Unit: UTY-XSZX
- External input and output PCB (with bracket): UTY-XCSX + UTY-GXNA
- External Input and Output PCB BOX: UTY-GXRA

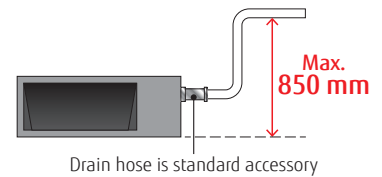

Dimensions

(Unit : mm)

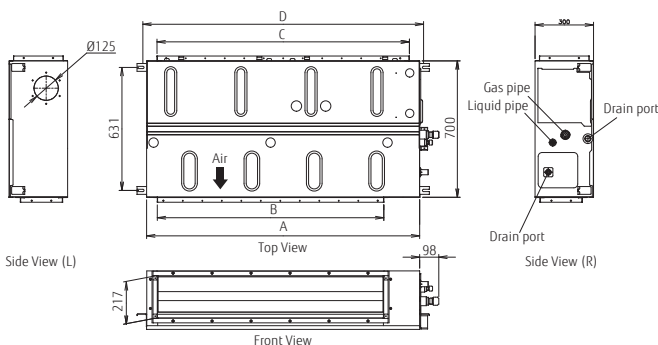

	ARYG12/14LHTBP	ARYG18/24/30LHTBP	ARYG36/45/54LHTBP
A	700	1,000	1,400
B	462	762	1,162
C	650	895	1,295
D	740	1,040	1,440