



SPLIT

# Medium Static Pressure Duct Standard



## Slim & Compact design


In the case of bottom return air connection, not only does the indoor unit design allow for installation in a narrow ceiling space of up to 270 mm, further space savings have been achieved by mounting the control box internally inside the chassis.

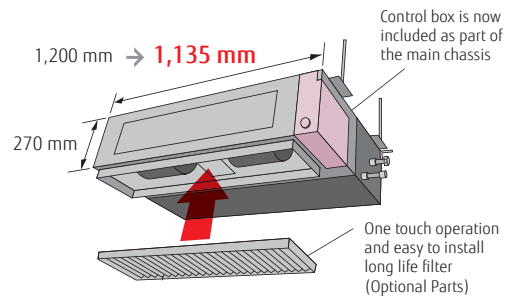


## Easy maintenance

Structural improvement is attained by making the bottom panel two pieces, front and rear. The internal fan casing is also manufactured in two pieces, namely upper and lower. The maintenance of the motor and fan can be easily carried out by removing the rear panel and the lower part of the casing while leaving the main chassis installed.


See below for the case of rear suction type

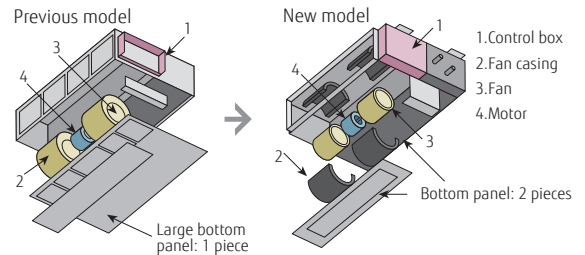

## Two-direction drain piping



## Low ambient operation

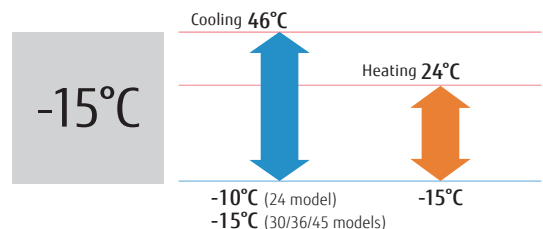

Model : ARYG24LMLA / ARYG30LMLE / ARYG36LMLE / ARYG45LMLA / ARYG36LMLA [3 phase] / ARYG45LMLA [3 phase]



Wired R.C.



For ARYG24LMLA



For ARYG30/36LMLE



For ARYG45LMLA (Single-phase)



For ARYG36/45LMLA


### Specifications

Model No.	Indoor unit		ARYG24LMLA	ARYG30LMLE	ARYG36LMLE	ARYG45LMLA	ARYG45LMLA	ARYG36LMLA	ARYG45LMLA
	Outdoor unit		AOYG24LBCB	AOYG30LETL	AOYG36LETL	AOYG45LBTC	AOYG45LETL	AOYG36LATT	AOYG45LATT
Power Source	Single-phase, ~230V, 50Hz						3-phase, ~400V, 50Hz		
Capacity	Cooling	kW	6.8 (0.9-8.0)	8.5 (2.8-10.0)	9.4 (2.8-11.2)	12.1 (4.0-13.0)	12.1 (4.0-13.3)	10.0 (4.7-11.4)	12.5 (5.0-14.0)
	Heating		8.0 (0.9-9.1)	10.0 (2.7-11.2)	11.2 (2.7-12.7)	13.3 (4.2-15.2)	13.1 (4.2-15.5)	11.2 (5.0-14.0)	14.0 (5.4-16.2)
Input Power	Cooling/Heating	kW	2.21/2.26	2.63/2.68	2.96/3.10	4.29/3.84	3.77/3.68	2.84/2.87	3.89/3.88
EER	Cooling	W/W	3.08	3.21	3.18	2.82	3.21	3.52	3.21
	Heating		3.54	3.73	3.61	3.46	3.61	3.90	3.61
COP	Cooling/Heating(-10°C)	kW	6.8/6.0	8.5/8.0	9.4/8.7	-	-	10.0/10.0	-
	Cooling		6.20	5.90	5.70	-	-	5.80	-
SEER	Cooling	W/W	4.00	3.90	3.80	-	-	4.00	-
	Heating		A++	A+	A+	-	-	A+	-
Energy Efficiency Class	Heating		A+	A	A	-	-	A+	-
	Max. Operating Current	Cooling/Heating	A	14.7/15.7	17.0/17.0	18.5/20.0	23.5/23.5	21.0/21.0	8.5/8.5
Annual Energy Consumption	Cooling	kWh/a	384	504	576	-	-	603	-
	Heating		2,099	2,868	3,202	-	-	3,497	-
Moisture Removal		l/h	2.5	2.5	3.0	4.0	4.0	3.0	4.5
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	31/29/27/25	39/35/30/26	39/35/30/26	42/38/32/28	42/38/32/28	38/36/31/26	42/38/32/28
	Indoor (Heating)	H/M/L/Q	31/29/27/25	42/35/30/26	42/35/30/26	42/38/32/28	42/38/32/28	40/36/31/26	42/38/32/28
	Outdoor(Cooling/Heating)	High	53/54	53/55	54/55	58/58	55/55	51/53	54/54
Sound Power Level	Indoor(Cooling/Heating)	High	60/62	65/69	65/70	-	-	65/67	-
	Outdoor(Cooling/Heating)	High	66/66	68/69	69/70	-	-	67/69	-
Airflow Rate	Indoor / Outdoor (Cooling)	High	1,100/2,850	1,900/3,600	1,900/3,800	2,100/4,650	2,100/6,750	1,800/6,200	2,100/6,750
	Indoor / Outdoor (Heating)	High	1,100/2,700	2,100/3,600	2,100/3,800	2,100/4,650	2,100/6,850	1,850/6,200	2,100/6,200
Static pressure range (Standard)		Pa	30 to 150 (35)	30 to 150 (47)	30 to 150 (47)	30 to 150 (60)	30 to 150 (60)	30 to 150 (47)	30 to 150 (60)
Net Dimensions H x W x D	Indoor	mm	270x1,135x700	270x1,135x700	270x1,135x700	270x1,135x700	270x1,135x700	270x1,135x700	270x1,135x700
	Outdoor	mm	716x820x315	830x900x330	830x900x330	914x970x370	1,290x900x330	1,290x900x330	1,290x900x330
Weight	Indoor	kg(lbs)	38 (84)	40 (88)	40 (88)	40 (88)	40 (88)	40 (88)	40 (88)
	Outdoor	kg(lbs)	42 (93)	61 (134)	61 (134)	75 (165)	86 (190)	104 (229)	104 (229)
Connection Pipe Diameter (Liquid / Gas)		mm	6.35/15.88	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88
Drain hose Diameter (I.D./O.D.)		mm	35.7/38.1	35.7/38.1	35.7/38.1	35.7/38.1	35.7/38.1	35.7/38.1	35.7/38.1
Max Pipe Length (Pre-Charge)		m	30 (15)	50 (20)	50 (20)	50 (20)	50 (20)	75 (30)	75 (30)
Max Height Difference			20	30	30	30	30	30	30
Operation Range	Cooling	°CDB	-10 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46
	Heating		-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24
Refrigerant	Type (Global Warming Potential)		R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)
	Charge	kg(CO2eq-T)	1.50 (3.1)	2.10 (4.4)	2.10 (4.4)	2.90 (6.1)	3.35 (7.0)	3.45 (7.2)	3.45 (7.2)

### Optional parts

Wired Remote Controller: UTY-RNNYM, UTY-RVNYM  
 Simple Remote Controller: UTY-RSNYM  
 Flange (Round): UTD-RF204  
 Flange (Square): UTD-SF045T  
 Long Life Filter: UTD-LF25NA

Remote Sensor Unit: UTY-XS2X  
 Drain Pump Unit: UTZ-PX1NBA  
 IR Receiver Kit: UTY-LRHYM  
 External connect kit: UTD-ECS5A  
 Wireless LAN Interface: UTY-TFNXZ1

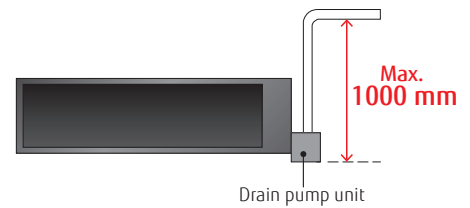

### Dimensions

(Unit : mm)

